


# Rocquette™ SweetSpot

ROCQUETTE™  
SWEETSPOT

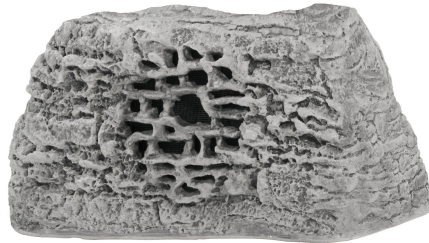

## Specifications: Rocquette™ SweetSpot

## Mounting hardware included

Nominal Impedance	4 ohm
Impedance (min)	4.0 ohm
Sensitivity dB @ 2.83V/1M	92.0 dB
Sensitivity dB @ 1W/1M (2)	89.0 dB
Frequency Response ( $\pm 3$ dB)	71 Hz - 20 kHz
Frequency Response ( $\pm 10$ dB)	60 Hz - 20 kHz
Max. Program Power	140 Watts
Max. Continuous Power RMS	70 Watts
Max. Power SPL @ 1 M	106.5dB
Transducer - Low Frequency Driver	6.5" Dual Voice Coil
Transducer - High Frequency Driver	(2) .75" Soft Dome
Colors	Brown, Grey, Sandstone
Tweeter - part	(2) .75" Soft Dome
Inputs	Wire lead
Height (SM = Height)	228.6 mm / 9.0"
Diameter (SM = Width)	393.7 mm / 15.5"
Weight	7.3 kg / 16 lb
Shipping Weight	10.0 kg / 22 lb
Accessories Optional	Security Bracket (RSB1)
Owner's Manual - color	<a href="#">Download Owners Manual</a>
Regulatory - CE	approved
Applications	The Rocquette will bring clear, inconspicuous sound to medium sized back yards, patios, pools, gardens, or courtyards.

---

# Rocquette™ SweetSpot

ROCQUETTE™  
SWEETSPOT



---

## Key Features

- 6.5 inch (203 mm) coaxial, two way weather resistant low frequency driver and one 1.0 inch (25 mm) weather resistant, high frequency driver.
- UV-, scratch-, chlorine- and weather resistant enclosure with professional grade components for long-lasting performance and durability.
- Layered and weathered shale texture.
- Open grille design is suited for placement in dense plants and shrubs.
- Color options: brown, gray or sandstone.
- Optional accessories: 64 Watt 70/100 volt transformer

## Description

Designed with a weathered / layered shale appearance, the Rocquette has a low vertical profile enabling its use underneath shrubs or among low plants. Its design incorporates a dual voice coil 6.5" woofer and two ¾" tweeters, providing optimal separation of left and right channels within a single enclosure.

## Applications

The Rocquette will bring clear, inconspicuous sound to medium sized back yards, patios, pools, gardens, or courtyards.

## This product uses our amazing technology

All Rockustics cabinets are constructed from a non-polluting stone and resin compound. The cabinets maintain a natural aesthetic, weather and age naturally, and are an earth-friendly alternative to plastic construction. To ensure 100% water- and weatherproofing, all Rockustics products come as a sealed unit. Therefore, the inclusion of optional transformers must occur prior to completion by manufacturer. Rockustics and MSE Audio constantly develops new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents. MSE Audio actively defends its patents in order to protect Rockustics resellers and end

users.

## Patented Rockustics Technologies

Rockustics and MSE Audio Group constantly develop new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents, which explicitly cover Rockustics dispersion, enclosure and dome technologies. MSE Audio Group actively defends its patents in order to protect Rockustics resellers and end users.

## Technical Data and Specification Tools

### Technical Data

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at [www.soundtube.com](http://www.soundtube.com). Technical data and downloads include: EASE™

---

# Rocquette™ SweetSpot

ROCQUETTE™  
SWEETSPOT



---

data - 3-D polar plots.  
EASE™ Address - 2-D  
modeling for distributed  
systems Autodesk® Revit®  
software Tech Sheets -  
Technical information and  
architectural specs for  
system engineers  
SoundTubeSPEC™ -  
Proprietary speaker  
placement software

## Data Acquisition and Verification

All data for SoundTube  
speakers are independently  
collected from and verified  
by NWAALabs  
([www.nwaalabs.com](http://www.nwaalabs.com)) using  
their proprietary MACH  
testing system. All data are  
collected and analyzed  
according to ASTM, ISO and  
AES standards using EASRA,  
TEF and MLSSA. Full  
balloon data including both  
phase and magnitude are  
compiled into a variety of  
formats including EASE 4.x,  
GLL and CLF.

## Architectural Specifications

The loudspeaker shall be an  
on-ground, coaxial design  
consisting of one 165.1 mm  
(6.5 in) low-frequency  
transducer and one 25 mm  
(1.0 in.) high-frequency

transducer. The low-  
frequency voice coil  
diameter shall be 25 mm  
(1.0 in). Performance  
specifications of a typical  
production unit shall be as  
follows: Usable frequency  
response shall extend from  
76 Hz- 22 kHz. Measured  
sensitivity (2.83 Volt input, 1  
meter) shall be at least 88  
dB. The loudspeaker shall  
have a nominal impedance of  
4 Ohms. The enclosure shall  
be constructed of a non-  
polluting elastomer  
reinforced resin polymer  
with pulverised stone. Color  
options shall be brown, gray  
or sandstone. All  
transducers and network  
circuitry are weather  
resistant and ship in a sealed  
enclosure. The external  
wiring input connector shall  
be hardwire leads. The  
overall cabinet dimensions  
shall be no more than 228.6  
mm (9.0 in) in height by  
393.7 mm (15.5 in) in width  
by 279.4 mm (11.0 in). The  
unit shall weigh no more  
than 7.3 kG (16 lbs). The  
system shall be the  
Rocquette for both low and  
high impedance  
applications.

## Rockustics

8005 W 110th Street, Suite  
208  
Overland Park, KS 66210  
Phone 913.663.5600  
Fax 913.663.3200  
Toll Free (855) 663-5600  
<http://rockustics.mseaudio.com>  
All SoundTube products come  
with a 5-year limited warranty.

---

# Rocquette™ SweetSpot

ROCQUETTE™  
SWEETSPOT



---

## Optional Accessories



**Security Bracket (RSB1)**