


TELESTONE™ RX RECEIVER

TELESTONE™
RX RECEIVER

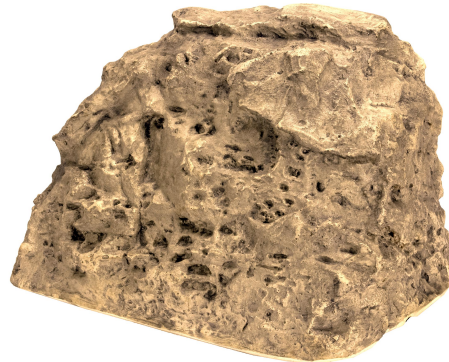

Specifications: TELESTONE™ RX RECEIVER

Mounting hardware included

| | |
|------------------------------|---|
| Power Requirements | 32V, 3.75A |
| Power Supply | 32V, 3.75A |
| Amplifier Output Power | 50w/ch @ 8 ohms 65w/ch@ 4ohms |
| Modulation | Digital |
| Dynamic Range | 90 dB |
| Outputs | 2 speaker level 2.5' direct burial rated cables |
| Height (SM = Height) | 12.5 in |
| Diameter (SM = Width) | 12.5 in |
| SM Depth (Including Bracket) | 10.5 in |
| Weight | 6.8 kg / 15 lbs |
| Owner's Manual - color | Download Owners Manual |
| Applications | Its natural, weathered stone aesthetic makes the TeleStone an ideal choice for theme parks, promenades, playgrounds, shopping malls, restaurants, resorts, gardens and other outdoor applications. The TeleStone utilizes a sedimentary rock design to match its natural environment. |

TELESTONE™ RX RECEIVER

TELESTONE™
RX RECEIVER



Key Features

- Uncompressed 2-channel audio for maximum fidelity.
- Receiver unit includes 2-channel 50W/ ch Class D amplifier.
- 3 RF channels to minimize interference from other devices (specify channel upon order).
- Each channel contains 3 bands, alternating between them to preemptively counteract interference, keeping the signal clear and latency less than 20 ms.
- Multiple receiver/amplifier units may be used with a single transmitter.
- Up to 12 receivers may be used for each transmitter. For more than 12, use an additional transmitter on another frequency.
- USB, stereo mini or 1/4" balanced input connections at the transmitter. A dual RCA adapter will be included.
- High/Low power selector switch on transmitter limits RF range where needed.

Description

The Rockustics TeleStone is a premium uncompressed 2-channel audio wireless system. The TeleStone

wireless transmitter/receiver system is composed of two units, one TeleStone transmitter and one TeleStone receiver/amplifier unit housed in a realistic looking rock. Additional receivers may be ordered to accompany a single transmitter. The sealed enclosure is designed to withstand rain, frost, snow and ice. The receiver rock comes with two strands of direct-burial cable for connection to the speakers and a grounded plug for connection to an AC power source. The direct-burial rated cables are 2.5 feet long. Any additional speaker cable is to be provided by the customer.

Applications

Its natural, weathered stone aesthetic makes the TeleStone an ideal choice for theme parks, promenades, playgrounds, shopping malls, restaurants, resorts, gardens and other outdoor applications. The TeleStone utilizes a sedimentary rock design to match its natural environment.

Patented Rockustics Technologies

All Rockustics cabinets are constructed from a non-polluting stone and resin compound. The cabinets maintain a natural aesthetic, weather and age naturally, and are an earth-friendly alternative to plastic construction. To ensure 100% water- and weatherproofing, all Rockustics products come as a sealed unit. Rockustics and MSE Audio constantly develop new technologies that enhance audio product performance. Rockustics innovations are protected by multiple U.S. and international patents. MSE Audio actively defends its patents in order to protect Rockustics resellers and end users.

Patented Rockustics Technologies

Rockustics and MSE Audio Group constantly develop new technologies that enhance audio product performance. Rockustics

TELESTONE™ RX RECEIVER

TELESTONE™
RX RECEIVER



innovations are protected by multiple U.S. and international patents, which explicitly cover Rockustics dispersion, enclosure and dome technologies. MSE Audio Group actively defends its patents in order to protect Rockustics resellers and end users.

Technical Data and Specification Tools

Technical Data

SoundTube Entertainment strives to provide complete and effective technical information and data to dealers, engineers and designers. All data are available from SoundTube Entertainment or at www.soundtube.com. Technical data and downloads include: EASE™ data - 3-D polar plots. EASE™ Address - 2-D modeling for distributed systems Autodesk® Revit® software Tech Sheets - Technical information and architectural specs for system engineers SoundTubeSPEC™ - Proprietary speaker placement software

Data Acquisition and Verification

All data for SoundTube speakers are independently collected from and verified by NWA Labs (www.nwaalabs.com) using their proprietary MACH testing system. All data are collected and analyzed according to ASTM, ISO and AES standards using EASRA, TEF and MLSSA. Full balloon data including both phase and magnitude are compiled into a variety of formats including EASE 4.x, GLL and CLF.

Architectural Specifications

The TeleStone wireless system shall consist of one TeleStone transmitter and one TeleStone receiver. Performance specifications of a typical TeleStone wireless system shall be as follows: Operating range at full power will reach 150 ft (45.7 meters) indoors and 210 ft (64 meters) line of sight. At low power, operating range will be reduced to 50 ft (15.2 meters) indoors or 70 ft (21.3 meters) line of sight. Dynamic range shall be 90

dB with an audio frequency ranging from 20 Hz - 20 kHz. The system will transmit in uncompressed audio signal over a 2.4 GHz RF Band with three selectable RF channels to minimize interference. Antenna impedance shall be 50 ohms. The TeleStone transmitter unit housing material shall be constructed of powder coated metal. Power requirements for the unit will be a 5 v, 1.2 A power supply. Input options at the transmitter include USB, stereo mini or 1/4" balanced input connections. Overall dimensions shall be no more than 44.45 mm (1.75 in.) in height by 157.16 mm (6.1875 in.) in width by 165.1 mm (6.5 in.) in depth. The unit shall include two removable antennae. The TeleStone receiver/amplifier unit housing material shall be constructed of a non-polluting stone and resin compound. The housing will be fully sealed and is available in brown, gray or sandstone. Power requirements for the unit will be 120 v 60 Hz. Latency shall be no greater than 20 ms. Receiver amplifier power output shall be 50 w per channel at 8 ohms. Overall dimensions shall be no more than 317.5 mm

TELESTONE™ RX RECEIVER

TELESTONE™
RX RECEIVER



(12.5 in.) in height by 266.7
mm (10.5 in.) in width by
266.7 mm (10.5 in.) in depth.

The system shall be the
Rockustics TeleStone for
both low- and high-
impedance applications.

Rockustics

8005 W 110th Street, Suite
208

Overland Park, KS 66210

Phone 913.663.5600

Fax 913.663.3200

Toll Free (855) 663-5600

<http://rockustics.mseaudio.com>

All SoundTube products come
with a 5-year limited warranty.